




CAP SCREWS

Lag Screws
Hex Head

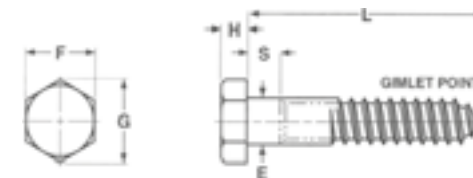

Basic Product Diameter		Threads per Inch	E		F			G		H			S	
			Body or Shoulder Diameter		Width Across Flats			Hex Lag Screws						Shoulder Length
								Width Across Corners		Head Height				
Max.	Min.	Basic	Max.	Min.	Max.	Min.	Basic	Max.	Min.	Min.				
1/4	0,2500	10	0,260	0,237	7/16	0,438	0,425	0,505	0,484	11/64	0,188	0,150	0,094	
5/16	0,3125	9	0,324	0,298	1/2	0,500	0,484	0,577	0,552	7/32	0,235	0,195	0,125	
3/8	0,3750	7	0,388	0,360	9/16	0,562	0,544	0,650	0,620	1/4	0,268	0,226	0,125	
7/16	0,4375	7	0,452	0,421	5/8	0,625	0,603	0,722	0,687	19/64	0,316	0,272	0,156	
1/2	0,5000	6	0,515	0,482	3/4	0,750	0,725	0,866	0,826	11/32	0,364	0,302	0,156	
5/8	0,6250	5	0,642	0,605	15/16	0,938	0,906	1,083	1,033	27/64	0,444	0,378	0,312	
3/4	0,7500	4-1/2	0,768	0,729	1-1/8	1,125	1,088	1,299	1,240	1/2	0,524	0,455	0,375	