



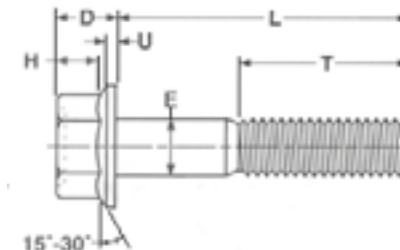

CAP SCREWS

Reliant Frame Bolts Grade 8 – Alloy



Nominal Size Or Basic Major Dia. Of Thread		E		F			G		B	U	H		LT	
		Body Dia.		Width Across Flats			Width Across Corners		Flange Dia.	Flange Thick- ness	Head Height		Thread Lngth.	
		Max.	Min.	Basic	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	L<6 In.	L>6 In.
3/8	0,3750	0,3750	0,3690	9/16	0,563	0,551	0,650	0,618	0,810	0,060	0,390	0,250	1,000	1,250
1/2	0,5000	0,5000	0,4930	3/4	0,750	0,736	0,866	0,825	1,070	0,080	0,510	0,340	1,250	1,500
5/8	0,6250	0,6250	0,6170	15/16	0,938	0,922	1,083	1,034	1,330	0,100	0,620	0,420	1,500	1,750
3/4	0,7500	0,7500	0,7410	1-1/8	1,125	1,100	1,299	1,234	1,590	0,110	0,730	0,510	1,750	2,000