




NUTS

HEX CASTLE NUTS

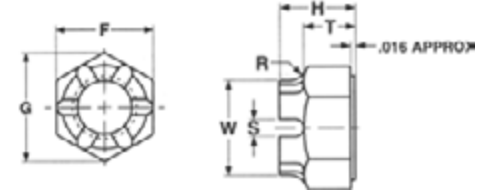

Nominal Size or Basic Major Dia. of Thread		F			G		H			T			S		R	W	Runout of Bearing Surface FIR
		Width Across Flats			Width Across Corners		Thickness			Unslotted Thickness and Height of Flat			Width of Slot		Radius of Fillet	Dia of Cylindrical	
		Basic	Max	Min	Max	Min	Basic	Max	Min	Nom	Max	Min	Max	Min	+ .010	Min	
5/8	0,625	15/16	0,938	0,922	1,083	1,051	23/32	0,731	0,706	1/2	0,51	0,49	0,24	0,18	0,156	0,797	0,021
3/4	0,750	1-1/8	1,125	1,088	1,299	1,240	13/16	0,827	0,798	9/16	0,57	0,55	0,24	0,18	0,188	0,941	0,023
7/8	0,875	1-5/16	1,312	1,269	1,516	1,447	29/32	0,922	0,890	21/32	0,67	0,64	0,24	0,18	0,188	1,097	0,025
1	1,000	1-1/2	1,500	1,450	1,732	1,653	1	1,018	0,982	23/32	0,73	0,7	0,3	0,24	0,188	1,254	0,027