




# NUTS

## NYLON INSERT STOP NUTS

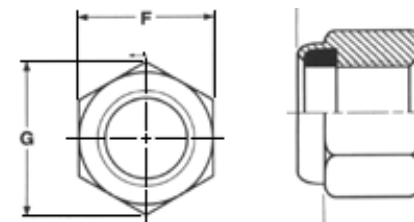

Nominal Size or Basic Thread Diameter		F			H		I	G
		Width Across Flats			Thickness		Side Height	Width Across Comers
		Basic	Max.	Min.	Max.	Min.	Ref.	Ref.
4	0,112	1/4	0,251	0,241	0,153	0,133	0,081	0,268
6	0,138	5/16	0,313	0,302	0,188	0,168	0,103	0,399
8	0,164	11/32	0,345	0,332	0,239	0,219	0,140	0,374
10	0,190	3/8	0,376	0,362	0,249	0,229	0,140	0,410
1/4	0,250	7/16	0,439	0,428	0,328	0,298	0,225	0,482
5/16	0,313	1/2	0,502	0,489	0,359	0,329	0,250	0,552
3/8	0,375	9/16	0,565	0,551	0,468	0,438	0,335	0,622
7/16	0,438	11/16	0,690	0,675	0,468	0,438	0,324	0,698
1/2	0,500	3/4	0,752	0,736	0,609	0,579	0,464	0,837
9/16	0,563	7/8	0,877	0,861	0,656	0,626	0,469	0,978
5/8	0,625	15/16	0,940	0,922	0,765	0,735	0,593	1,051
3/4	0,750	1-1/8	1,127	1,088	0,890	0,860	0,742	1,191
7/8	0,875	1-5/16	1,315	1,269	0,999	0,969	0,790	1,430
1	1,000	1-1/2	1,502	1,450	1,078	1,061	0,825	1,615
1-1/8	1,125	1-11/16	1,690	1,631	1,203	1,141	0,930	1,826
1-1/4	1,250	1-7/8	1,877	1,812	1,422	1,360	1,125	2,038
1-1/2	1,500	2-1/4	2,252	2,175	1,640	1,578	1,313	2,444