




SELF TAPPING SCREWS

HEX WASHER SLOTTED Self Piercing Screws

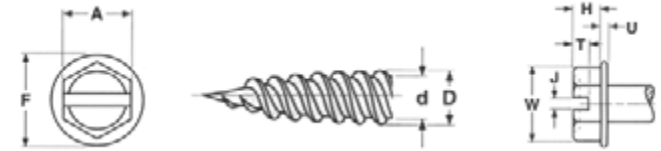

| Size | A | | W | H | | F | | U | | J | | T | | D | | d | |
|-------|--------------------|------|---------------------|-------------|------|--------------|------|------------------|------|------------|------|------------|------|-------------|------|-------------|------|
| | Width Across Flats | | Width Across Corner | Head Height | | Washer Diam. | | Washer Thickness | | Slot Width | | Slot Depth | | Major Diam. | | Minor Diam. | |
| | Max. | Min. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. | Max. | Min. |
| 6-18 | .250 | .244 | .272 | .093 | .080 | .328 | .302 | .025 | .015 | .048 | .039 | .053 | .033 | .141 | .136 | .102 | .096 |
| 7-16 | .250 | .244 | .272 | .093 | .080 | .328 | .302 | .029 | .017 | .048 | .039 | .062 | .040 | .158 | .152 | .114 | .108 |
| 8-15 | .250 | .244 | .272 | .110 | .096 | .348 | .322 | .031 | .019 | .054 | .045 | .074 | .052 | .168 | .162 | .123 | .116 |
| 10-12 | .258 | .244 | .272 | .110 | .096 | .414 | .384 | .031 | .019 | .054 | .045 | .074 | .052 | .194 | .188 | .133 | .126 |