




# SELF TAPPING SCREWS

## SQUARE DRIVE FLAT HEAD Head Dimensions

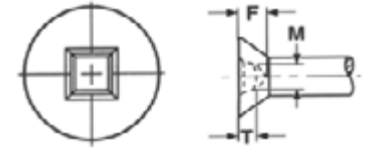

This type of recess has a square center opening slightly tapered side walls and a conical bottom.

Nominal Size or Basic Screw Diameter		M Recess Square		T Recess Depth		Drive Size	F Penetration Gauging Depth	
		Max	Min.	Min.	Max.		Max.	Min.
3	0.0990	0.071	0.0696	0.073	0.063	0	0.038	0.032
4	0.1120	0.071	0.0696	0.073	0.063	0	0.038	0.032
5	0.1250	0.091	0.090	0.113	0.105	1	0.065	0.057
6	0.1380	0.091	0.090	0.113	0.105	1	0.065	0.057
7	0.1510	0.091	0.090	0.113	0.105	1	0.065	0.057
8	0.1640	0.1126	0.111	0.140	0.119	2	0.075	0.065
10	0.1900	0.1126	0.111	0.140	0.119	2	0.075	0.065
12	0.2160	0.133	0.1315	0.165	0.155	3	0.095	0.085
1/4	0.2500	0.133	0.1315	0.165	0.155	3	0.095	0.085
5/16	0.3125	0.191	0.1895	0.201	0.191	4	0.100	0.090
3/8	0.3750	0.191	0.1895	0.201	0.191	4	0.100	0.090