




# SEMS

## LOCK WASHERS FOR SEMS

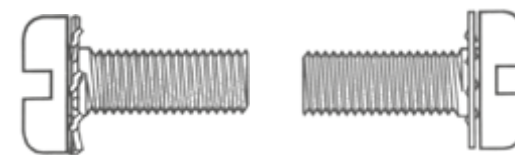


Nominal Size or Basic Screw		INTERNAL TOOTH				EXTERNAL TOOTH			
		Washer Thickness		Washer Outside Diameter		Washer Thickness		Washer Outside Diameter	
		Max	Min	Max	Min	Max	Min	Max	Min
2	0.0860	0.016	0.010	0.185	0.175	0.016	0.010	0.180	0.170
4	0.1120	0.019	0.015	0.268	0.258	0.020	0.012	0.230	0.220
6	0.1380	0.021	0.017	0.288	0.278	0.020	0.014	0.285	0.270
8	0.1640	0.023	0.018	0.338	0.327	0.023	0.018	0.320	0.305
10	0.1900	0.025	0.020	0.383	0.327	0.024	0.018	0.381	0.365



# SEMS

## LOCK WASHERS FOR SEMS

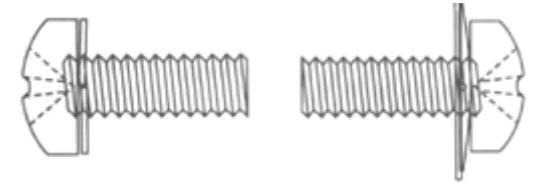

Nominal Size or Basic Screw		SPLIT LOCK				SQUARE CONICAL			
		Washer Thickness		Washer Outside Diameter		Washer Thickness		Washer Outside Diameter	
		Max	Min	Max	Min	Max	Min	Max	Min
4	0.1120	0.031	0.025	0.208	0.195	0.015	0.007	0.250	0.244
6	0.1380	0.040	0.031	0.261	0.248	0.025	0.019	0.320	0.307
8	0.1640	0.047	0.040	0.319	0.305	0.030	0.025	0.383	0.370
10	0.1900	0.056	0.047	0.373	0.359	0.032	0.026	0.446	0.433